



SBA-Satori TW29BN Tweeter 1.2" Transducer Model

Sound Pressure Level at 1m, 2.83Vrms on Infinite Baffle

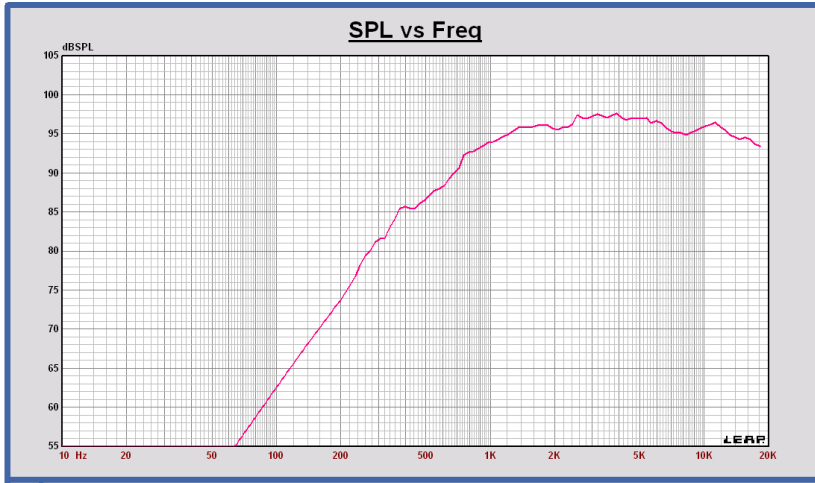

Impedance at 2.83Vrms on Infinite baffle

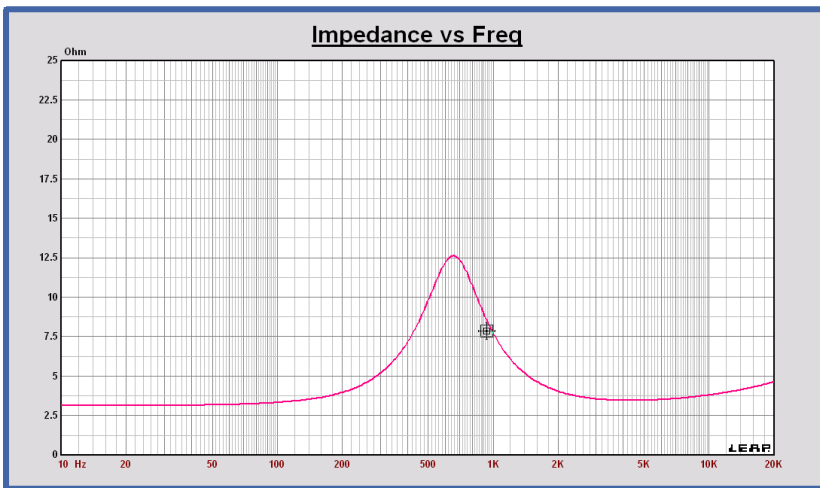

Leap Transducer Model

Transducer Parameters

Name: Spec based FVCL_Satori TW29BN	Levco Motor: []	Model: TSL	Shape: Round	Fmd: 100.000	KA: 100.000	Flp: 100.000	KA: 100.000	Mms: 400.0000u	Kg: 1.5997	Qms: 1.5997
Note: Motor constants approximated by Levco	SPL Mech: []	Domain: InfBaf	Profile: Dome	Qmd: 1.000	Qlp: 1.000			Cms: 146.2610u	M/N: 0.5005	Qes: 0.5005
Znom: 4.000	Xgap: 1.500m	Krm: 250.00000u	Kxm: 1.50000m	Krs: 910.19054m	N-S/M: 1.91000m	Kcs: 1.91000m	M/N: 1.91000m	Vas: 19.2526m	Ltr: 0.3812	Qts: 0.3812
Revc: 3.000	Xcoil: 2.000m	Frm: 1.00000K	Fxm: 1.00000	Xrs: 10.00000m	M: 10.00000m	Xcs: 10.00000m	M: 10.00000m	Rms: 1.0338	N-S/M: 70.263u	Levc: 70.263u
Sd: 9.600	Xmax: 250.000u	Drm: 0.65000	Dxm: 0.65000	Drs: 0.00000	Dcs: 0.00000	Dcs: 0.00000	Dcs: 0.00000	Fo: 658.0000	Hz: 92.233	SPLo: 92.233
Mmd: 365.813u	Xlrg: 1.000m	Erm: 0.65000	Exm: 0.65000	Ers: 0.00000	Ecs: 0.00000	Ecs: 0.00000	Ecs: 0.00000	BL: 3.1485	T-M: 1.0507	No: 1.0507
Pmax: 55.006	Efrg: 1.00000	Vrm: 0.00000	Vxm: 0.00000	Grs: 0.80000	Gcs: 0.80000	Gcs: 0.80000	Gcs: 0.80000	Vs: 2.0000	v: 25.00	Ta: 25.00
Rtvc: 4.545	BLo: 3.1485	Trm: 0.000	Txm: 0.000	Trs: 0.000	Tcs: 0.000	Tcs: 0.000	Tcs: 0.000			

Buttons: [Ok] [Cancel] [Help]

Footer: [Copy as Text] [Copy as Binary] [Paste From Text] [Paste From Binary] [Check Params] [Auto Check] [Show Graph]