



Audax TW025A0-8 Tweeter 1" Transducer Model

Sound Pressure Level at 1m, 2.83Vrms on Infinite Baffle

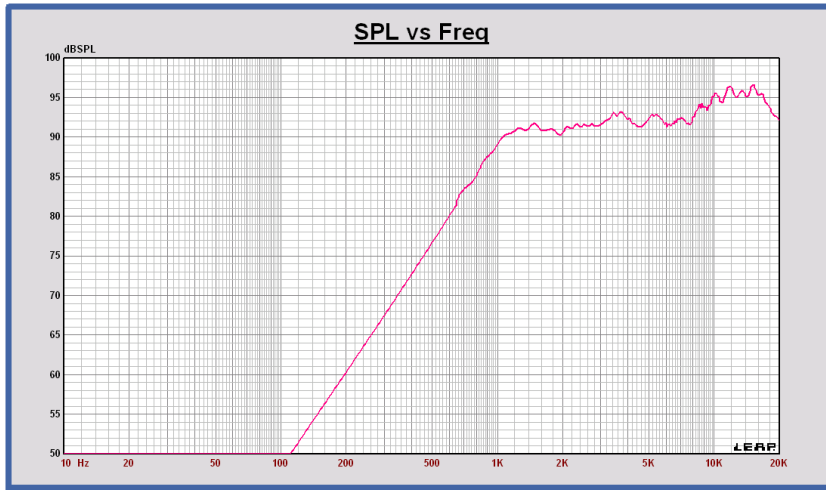

Impedance at 2.83Vrms on Infinite baffle

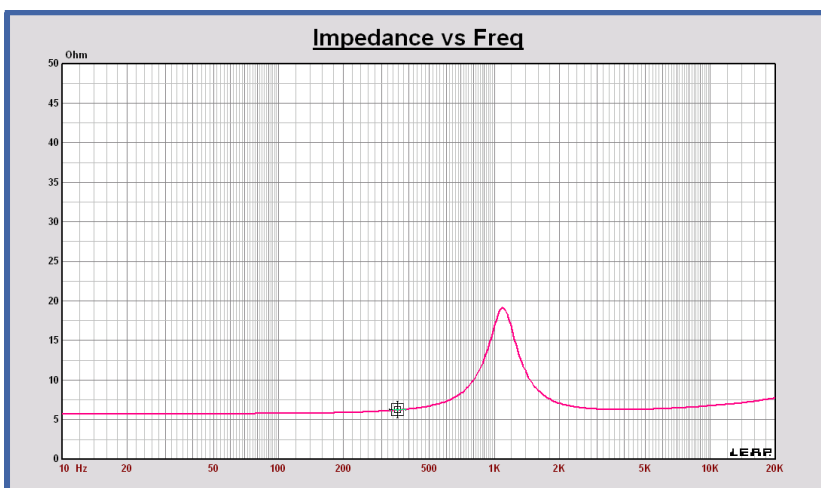

Leap Transducer Model

Transducer Parameters

Name	Levo Motor	Model	Shape	Fmd	KA	Flp	KA	Mms	Kg	Qms
Clio19_PVCL_Audax TW025A0		TSL	Round	2.200		3.300		150.0000u		3.4400
Note	SPL Mech	Domain	Profile	Qmd	Qlp			Cms	uM/N	Qes
	In/Baf	Dome		1.100	1.600			141.6132		1.3985
Znom	Xgap	Kim	Kxm	Krs	N-S/M	Kcs	M/N	Vas	Ltr	Qts
8.000	1.700m	500.00000u	2.00000m	96.05800		20.20000u		4.8763m		0.9943
Revc	Xcoil	Fm	Fxm	Xrs	M	Xcs	M	Rms	N-S/M	Levc
5.600	3.000m	20.24450K	3.29030K	980.43200u		979.19300u		299.1819m		93.684
Sd	Xmax	Drm	Dxm	Drs	Dcs	Dcs		Fo	Hz	SPLo
491.000u	650.000u	1.19240	0.41959	0.35478		0.47755		1.0920K		88.406
Mmd	Xfmg	Ern	Exm	Ers	Ecs	Ecs		BL	T-M	No
137.495u	238.552m	0.65000	0.65000	0.48400		0.27600		2.0301		0.4353
Pmax	Walt	Vrm	Vxm	Grs	Gcs	Gcs		Vs	V	Ta
55.006	7.65700	0.00641	0.01305	0.66100		1.08300		2.8284		25.00
Rtvc	C/W	Trm	Txm	Trs	Δ°C	Tcs	Δ°C	Qk	Cancel	Help
4.545	2.0301	2.382m	1.563m	-15.595m		2.968m				

Copy as Text | Copy as Binary | Paste From Text | Paste From Binary | Check Params | Auto Check | Show Graph